



**230 Watt - 250 Watt**  
monocrystalline module - NRG 60



**Product Overview:**

Eclipsall's NRG modules are optimally manufactured and designed to meet the unique demands of the Ontario market.

Ideal for commercial and residential grid-tied roof systems as well as ground-mounted arrays.

Designed to withstand rigorous operating conditions, this module offers high power output per square foot.

**Superior Performance**

- Module efficiency of over 17%
- Positive power tolerance (0% to 2%)

**Quality and Expertise**

- Eclipsall utilizes high-quality materials, equipment and expertise to deliver best-in-class PV modules

**10-Year Workmanship Warranty**  
**Industry-Leading Performance Warranty**

Linear degradation over a 25 year period

- 97% of the Rated Maximum Power at year 1
- At least 94.9% at year 3
- At least 83% at year 20

**Engineering Excellence**

- Globally recognized European manufacturing technology delivering a module with industry-leading efficiency

**Eclipsall Energy Corp.**

5900 Finch Avenue East, Toronto, Ontario M1B 5X7  
Tel: 416.716.3390 www.eclipsall.com

Manufactured in:



## Crystalline Solar Module

Performance Classes	230Wp, 235Wp, 240Wp, 245Wp, 250Wp
Performance Sorting	+2%
Cells	60x monocrystalline solar cells, 3 bus bar
Structure	<ul style="list-style-type: none"> <li>Glass – EVA – Solar Cells – EVA – Backsheet</li> <li>Tempered low iron 4 mm glass</li> <li>Multi-layer composite film backsheet</li> <li>Anodized aluminum frame</li> <li>Tyco junction box (IP65 rated)</li> <li>SOLARLOK rear connections (IP67 rated)</li> </ul>

## Weak Light Performance

Intensity (W/m <sup>2</sup> )	VMPP (%)	IMPP (%)
800	0.0	-20
600	-0.8	-40
400	-2.2	-60
200	-4.9	-80


## Electrical Parameters

	230	235	240	245	250
Rated Maximum Power at STC (W)	230W	235W	240W	245W	250W
Open Circuit Voltage (Voc/V)	36.75	36.82	36.97	37.18	37.38
Maximum Power Voltage (Vmp/V)	29.79	30.00	30.20	30.26	30.32
Short-Circuit Current (Isc/A)	8.54	8.62	8.71	8.76	8.79
Maximum Power Current (Imp/A)	7.73	7.85	7.97	8.12	8.26
Power Tolerance	0% to +2%				

## Mechanical Parameters

Cell (mm)	Mono 156x156
Weight (Kg)	22
Dimensions (LxWxH)(mm)	1663x997x42
Cable Length (mm)	>1,000
Cable cross-section size (mm <sup>2</sup> )	4
Cells and connections	60(10x6)
Bypass diodes	3
Packing configuration	25pcs/carton

## Dimensions

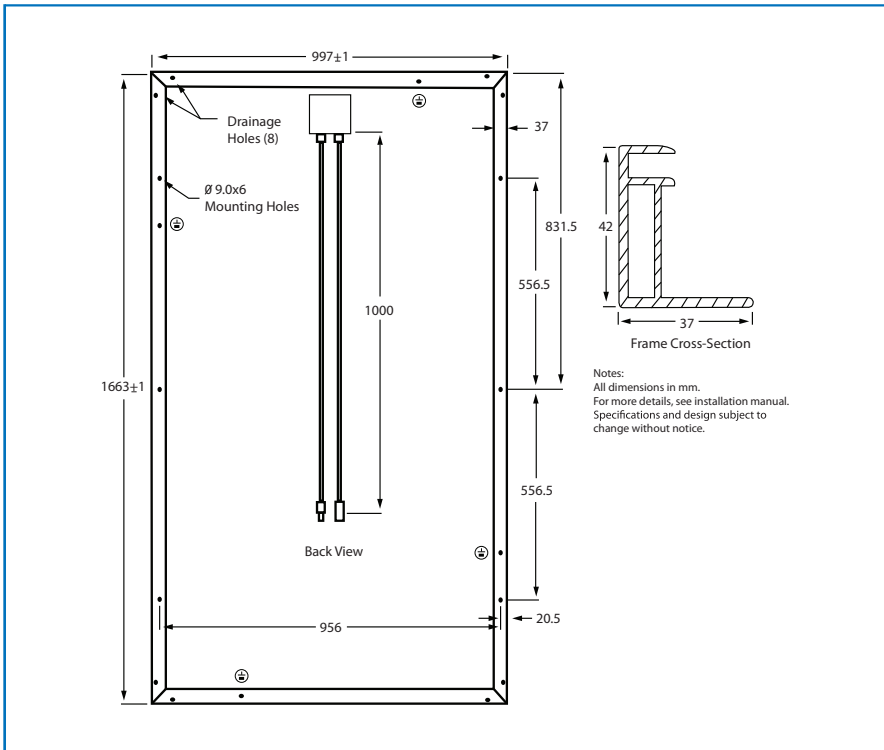

## Working Conditions

Maximum System Voltage	UL 600V/ IEC 1,000 V
Operating Temperature	-40 to 85°C
NOCT	45+/-2°C

## Notes

- All modules manufactured by Eclipsall will undergo flash testing and will be sorted accordingly.
- Power Specification under Standard Test Conditions (STC): 1,000 W/m<sup>2</sup>; 25°C; AM 1.5

